
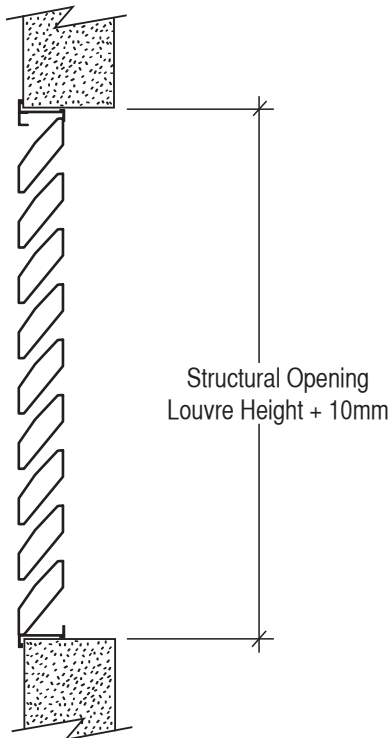


ACRAN ACRAFLOW SERIES 100 ACOUSTIC LOUVRE

Model	NOISE REDUCTION (dB)						dB
	Octave Band Centre Frequencies (Hz)						
	125	250	500	1000	2000	4000	
Series 100	14	14	16	21	27	27	dB
Series 100S	13	13	15	20	23	23	dB

Noise Reduction = Transmission Loss + 6dB across all frequencies

ACRAN louvres are tested in accordance with AS 1191-2002.
 Please refer to ACRAN for detailed Performance Data.

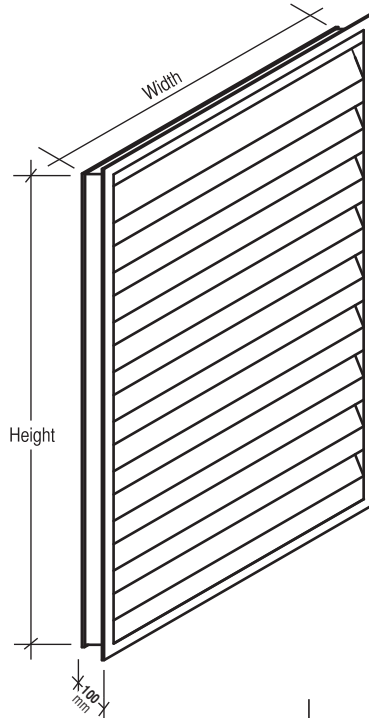

TYPICAL SECTIONAL ELEVATION



TYPICAL SECTIONAL PLAN

Individual Acran Louvre Segment Limitations

- Minimum Height 340 mm
- Maximum Height 4500 mm
- Maximum Width 4500 mm

Where Face Area exceeds 6.0 square metres please consult ACRAN for handling limitations