


ACRAN ACRAFLOW SERIES 600 ACOUSTIC LOUVRE

Model	NOISE REDUCTION (dB)						dB
	Octave Band Centre Frequencies (Hz)						
	125	250	500	1000	2000	4000	
Series 600/20	15	20	32	37	32	32	
Series 600/16	16	22	27	34	36	33	

Noise Reduction = Transmission Loss + 6dB across all frequencies

ACRAN louvres are tested in accordance with AS 1191-2002.
Please refer to ACRAN for detailed Performance Data.

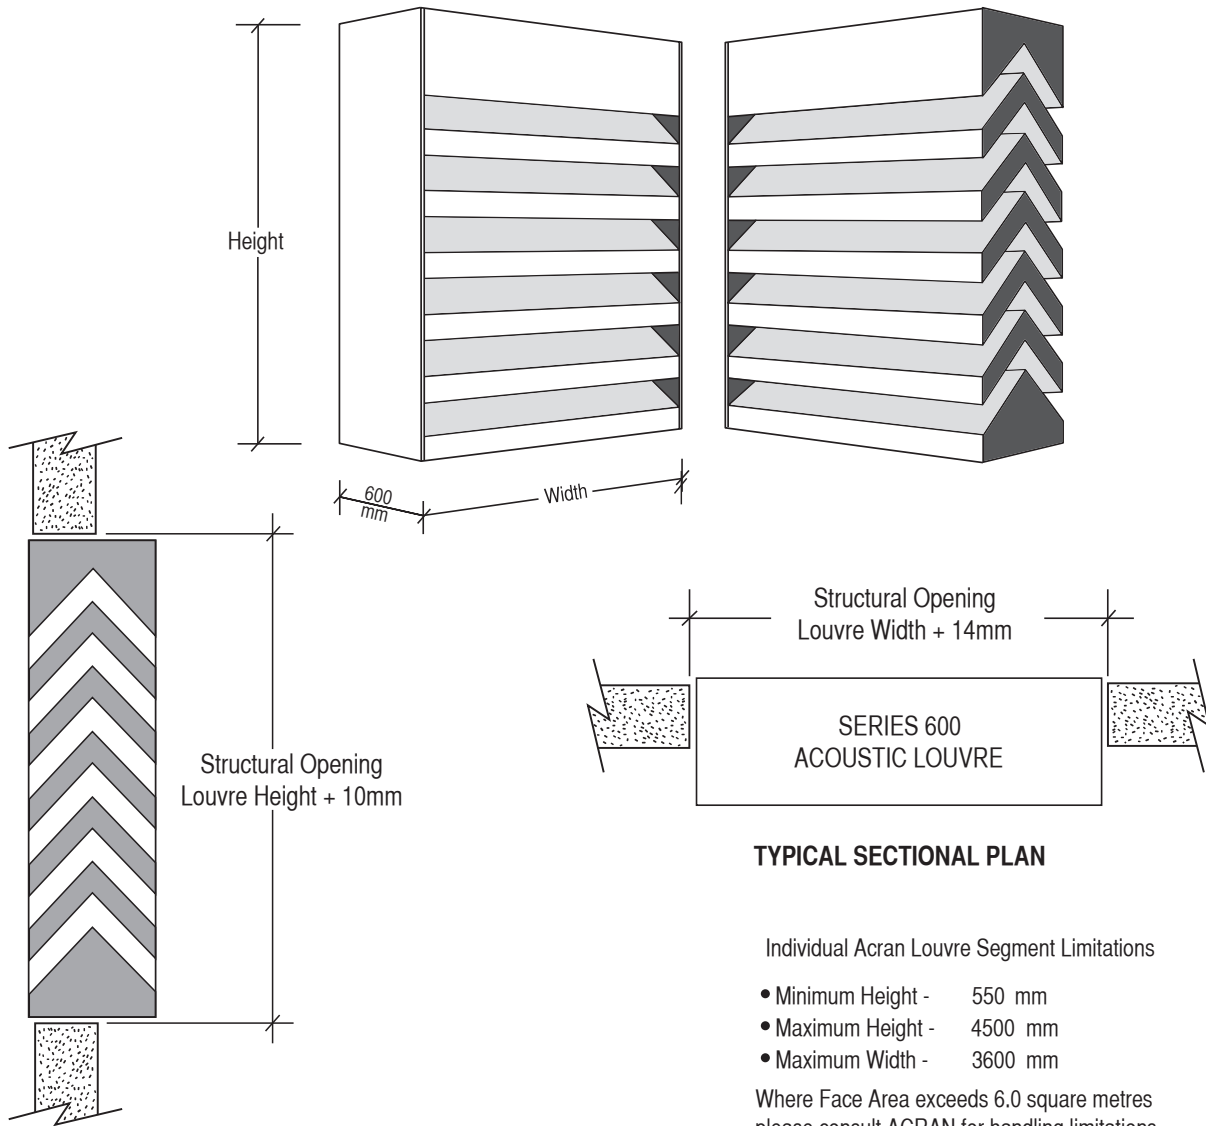

TYPICAL SECTIONAL ELEVATION

TYPICAL SECTIONAL PLAN

Individual Acran Louvre Segment Limitations

- Minimum Height - 550 mm
- Maximum Height - 4500 mm
- Maximum Width - 3600 mm

Where Face Area exceeds 6.0 square metres please consult ACRAN for handling limitations to ensure your proposed combination of height and width can be constructed

Please enquire about multiple louvre arrangements and connection details. Triangulated, circular and non rectangular shapes are available.

Acran Acoustic Louvres can be built to almost any size subject to Air Pressure Drop & handling limitations.